

Features

- Standard configuration model available for normal applications.
- Side mount model available for low profile applications.
- Side/angle mount models available for special applications.
- Staggered models available for applications requiring continuous rows without dark spots.
- **Painted or specular reflectors must be ordered separately.**

T5 MICRO STRIP

- Suitable for unit or row mounting.
- High output models combine small size with a high lumen package.
- 5' model available with 80w T5HO lamp for very high lumen applications.
- Housing is multi-stage phosphate treated for maximum corrosion resistance and finish is baked white enamel.
- UL listed for damp locations. Units with emergency ballasts UL listed for dry locations.




T5 MICRO STRIP

The Micro Strips are a complete T5 strip family.

T5 MICRO STRIPS—PRODUCT AVAILABILITY

Nominal Length	Family	Lamps/ Cross Section	Lamps/ Type	Lamp in. (mm)	Length in. (mm)	Width in. (mm)	Depth in. (mm)
2	M	1	1	14, 24HO	22-1/2" (572)	1-11/16" (43)	2-1/2" (64)
3	M	1	1	21, 39HO	34-5/16" (872)	1-11/16" (43)	2-1/2" (64)
4	M	1	1	28, 54HO	46-1/8" (1172)	1-11/16" (43)	2-1/2" (64)
5	M	1	1	35, 80HO	57-15/16" (1472)	1-11/16" (43)	2-1/2" (64)
8	TM	1	2	28, 54HO	92-1/8" (2340)	1-11/16" (43)	2-1/2" (64)
2	M	2	2	14, 24HO	22-1/2" (572)	2-1/2" (64)	2-5/16" (59)
3	M	2	2	21, 39HO	34-5/16" (872)	2-1/2" (64)	2-5/16" (59)
4	M	2	2	28, 54HO	46-1/8" (1172)	2-1/2" (64)	2-5/16" (59)
5	M	2	2	35, 80HO	57-15/16" (1472)	2-1/2" (64)	2-5/16" (59)
8	TM	2	4	28, 54HO	92-1/8" (2340)	2-1/2" (64)	2-5/16" (59)
2	MSS	1	1	14, 24HO	22-1/2" (572)	3-3/16" (81)	2-3/8" (60)
3	MSS	1	1	21, 39HO	34-5/16" (872)	3-3/16" (81)	2-3/8" (60)
4	MSS	1	1	28, 54HO	46-1/8" (1172)	3-3/16" (81)	2-3/8" (60)
5	MSS	1	1	35, 80HO	57-15/16" (1472)	3-3/16" (81)	2-3/8" (60)
8	TMSS	1	2	28, 54HO	88-1/8" (2238)	3-3/16" (81)	2-3/8" (60)
2	MSS	2	2	14, 24HO	26-7/16" (672)	3-3/16" (81)	2-3/8" (60)
3	MSS	2	2	21, 39HO	38-1/4" (972)	3-3/16" (81)	2-3/8" (60)
4	MSS	2	2	28, 54HO	50-1/16" (1272)	3-3/16" (81)	2-3/8" (60)
5	MSS	2	2	35, 80HO	61-7/8" (1572)	3-3/16" (81)	2-3/8" (60)
8	TMSS	2	4	28, 54HO	96-1/16" (2440)	3-3/16" (81)	2-3/8" (60)
2	MNS	1	1	14, 24HO	22-1/2" (572)	2-9/16" (65)	1-9/16" (40)
3	MNS	1	1	21, 39HO	34-5/16" (872)	2-9/16" (65)	1-9/16" (40)
4	MNS	1	1	28, 54HO	46-1/8" (1172)	2-9/16" (65)	1-9/16" (40)
5	MNS	1	1	35, 80HO	57-15/16" (1472)	2-9/16" (65)	1-9/16" (40)
8	TMNS	1	2	28, 54HO	92-1/8" (2340)	2-9/16" (65)	1-9/16" (40)
2	MNS	2	2	14, 24HO	22-1/2" (572)	3-7/16" (87)	1-9/16" (40)
3	MNS	2	2	21, 39HO	34-5/16" (872)	3-7/16" (87)	1-9/16" (40)
4	MNS	2	2	28, 54HO	46-1/8" (1172)	3-7/16" (87)	1-9/16" (40)
5	MNS	2	2	35, 80HO	57-15/16" (1472)	3-7/16" (87)	1-9/16" (40)
8	TMNS	2	4	28, 54HO	92-1/8" (2340)	3-7/16" (87)	1-9/16" (40)
2	MNA	2	2	14, 24HO	22-1/2" (572)	2-9/16" (65)	2-1/2" (64)
3	MNA	2	2	21, 39HO	34-5/16" (872)	2-9/16" (65)	2-1/2" (64)
4	MNA	2	2	28, 54HO	46-1/8" (1172)	2-9/16" (65)	2-1/2" (64)
5	MNA	2	2	35, 80HO	57-15/16" (1472)	2-9/16" (65)	2-1/2" (64)
8	TMNA	2	4	28, 54HO	92-1/8" (2340)	2-9/16" (65)	2-1/2" (64)
2	MNA	3	3	14, 24HO	22-1/2" (572)	3-7/16" (87)	2-1/2" (64)
3	MNA	3	3	21, 39HO	34-5/16" (872)	3-7/16" (87)	2-1/2" (64)
4	MNA	3	3	28, 54HO	46-1/8" (1172)	3-7/16" (87)	2-1/2" (64)
5	MNA	3	3	35, 80HO	57-15/16" (1472)	3-7/16" (87)	2-1/2" (64)
8	TMNA	3	6	28, 54HO	92-1/8" (2340)	3-7/16" (87)	2-1/2" (64)

DIMENSIONS (SEE CHART ABOVE)

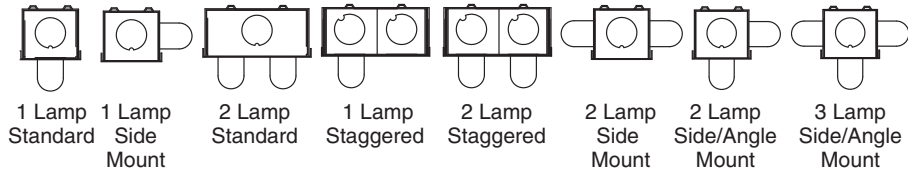

SAMPLE CATALOG NUMBER: M228-UNV-1/2-EB

Accessories

See facing page for reflectors and other accessories.

<p>FAMILY</p> <p>M – Micro Strip</p> <p>TM – Tandem Micro Strip</p> <p>MSS – Micro Staggered Strip</p> <p>TMSS – Tandem Micro Staggered Strip</p> <p>MNS – Micro Side Mount Strip</p> <p>TMNS – Tandem Micro Side Mount Strip</p> <p>MNA – Micro Side/Angle Mount Strip</p> <p>TMNA – Tandem Micro Side/Angle Mount Strip</p>	<p>NO. OF LAMPS/ CROSS SECTION</p> <p>(not included)</p> <p>1</p> <p>2</p> <p>3</p>	<p>LAMP TYPE/WATTAGE</p> <p>14 – 14wT5 (22")</p> <p>24HO – 24wT5HO (22")</p> <p>21 – 21wT5 (34")</p> <p>39HO – 39wT5HO (34")</p> <p>28 – 28wT5 (46")</p> <p>54HO – 54wT5HO (46")</p> <p>35 – 35wT5 (58")</p> <p>80HO – 80wT5HO (58")</p>	<p>VOLTAGE</p> <p>120</p> <p>277</p> <p>347</p> <p>UNV – Universal Voltage, 120-277 volt</p>	<p>OPTIONS</p> <p>CM – Canadian Market</p> <p>1/1 – One 1-lamp ballast (electronic or non-standard)</p> <p>1/2 – One 2-lamp ballast (electronic or non-standard)</p> <p>1/3 – One 3-lamp ballast (electronic or non-standard)</p> <p>1/21 – 2-lamp & 1-lamp ballasts (electronic or non-standard)</p> <p>1/4 – One 4-lamp ballast (electronic or non-standard)</p> <p>2/2 – Two 2-lamp ballasts (electronic or non-standard)</p> <p>1/42 – 4-lamp & 2-lamp ballasts (electronic or non-standard)</p> <p>EB – Electronic ballast, <20% THD</p> <p>EB10R – Electronic ballast, program rapid start, <10% THD</p> <p>E71P – DEB-71P emerg. ballast, 600-700 lumens, UL dry loc.</p> <p>E61P – DEB-61P emerg. ballast, 1230 lumens, UL dry loc.</p> <p>GLR# – Fusing, fast blow (# = number of ballasts)</p> <p>Power-Connect modular wiring – see page 187</p>
--	---	---	---	---

See pages 182-183 for mounting information and 187-192 for option info. See pages 202-203 for ballast and lamp info.